

application

location

product

Embankment/Sludge Lagoon

Columbus, Ohio

FW402 and HP1500

THE CHALLENGE

The extension of I-670 into downtown Columbus, Ohio had been on the drawing boards since the mid-1980s. The only alignment available was across a one-half mile stretch of gravel pits that had been filled with lime sludge from an adjacent water treatment plant. A 40 foot high embankment was required over the sludge lagoon. The sludge had a pH of 10 and was so soft that one could not even walk on it. Because of environmental consequences, it could not be removed from the site. The choices were a bridge or a geosynthetic reinforced embankment. The embankment design would save \$10 million.

THE DESIGN

A fully instrumented test fill was constructed and monitored for two years.

The test fill was reinforced with a high-strength Geolon HP-Series Geotextile. Data was collected using strain gages, extensometers, pneumatic pressure cells, inclinometers, piezometers and settlement gages. After analyzing the test data, a final design was achieved. The design required geosynthetic reinforcement of 2400 lbs/in at 5% strain to maintain an acceptable factor of safety.

CONSTRUCTION

A monofilament woven geotextile, Mirafi® Filterweave® 402, was deployed over the sludge lagoon (Figures 1 and 2). All seams were field sewn using a hand-held Union Special 2200B sewing machine. A prayer seam developed a grab tensile strength of 216 pounds, plenty for the design. Next, a layer of sand, three feet in thickness, was placed. Wick drains

were installed on a 6' by 6' grid to dry the sludge. The design called for a composite strength of 2400 lbs/in at 5% strain. To accomplish this design, three layers of high modulus, polypropylene, multifilament, woven geotextile, Mirafi® Geolon® HP1500, were installed 1 foot apart for reinforcement as the embankment was being built (Figure 3).

The final embankment was 40 feet above the level of the sludge with 2H:1V side slopes (Figure 4).

TC Mirafi provided the geotextiles and all field sewing through its local distributor, Site Supply, Inc.

Figure 1



JOB OWNER

City of Columbus/Ohio DOT

ENGINEER

Clyde E. Williams and Associates

CONTRACTOR

Kokosing Construction Company

DISTRIBUTOR

Site Supply, Inc.

PERFORMANCE

Nearly \$1 million of geosynthetics were used. Embankment continuity was maintained during construction as the structure settled approximately 10 ft. The embankment was constructed in 1997/1998. Final pavement will be placed after the surcharge is removed.

Figure 2




Figure 3



Figure 4



Cross-section of I-670 Project Embankment

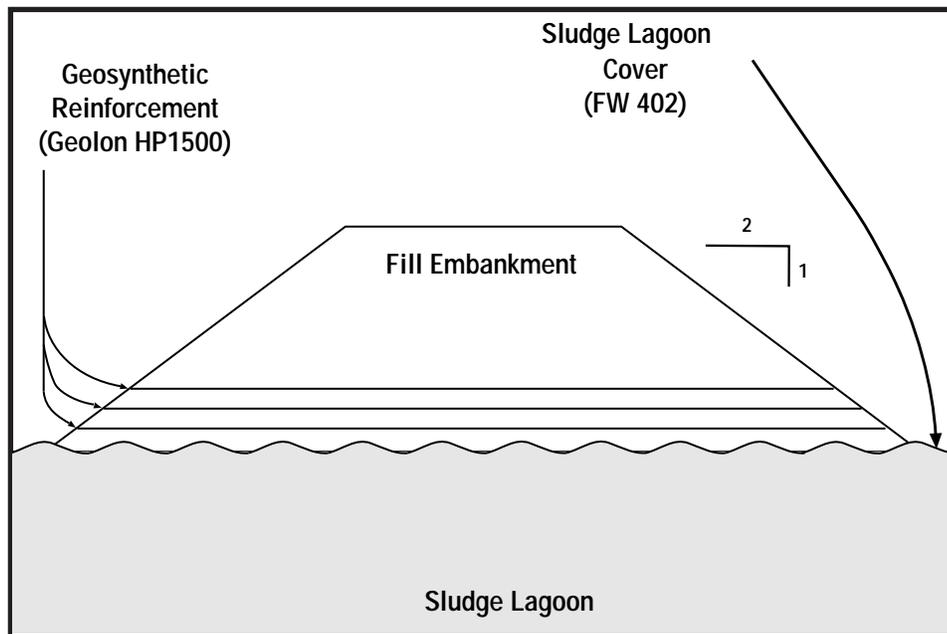

The information contained herein is to the best of our knowledge accurate, but since the circumstances and conditions in which it may be used are beyond our control, we do not accept any liability for any loss or damage, however arising, which results directly or indirectly from use of this information nor do we offer any warranty or immunity against patent infringement.

365 South Holland Drive
Pendergrass, GA 30567
(888) 795-0808
Fax (706) 693-4400
www.tcmirafi.com

