

Mirafi® BXG Geogrids for Base Course Reinforcement and Soil Stabilization Applications

TenCate develops and produces materials that deliver increased performance, reduce costs and measurable results when working with our customers to provide advanced solutions utilizing TenCate Mirafi® BXG geogrids that make a difference.

The Difference Mirafi® BXG Geogrids Make:

- **Reinforcement Strength.** High tensile modulus properties per ASTM D6637 for base reinforcement applications. For structures with dynamic short-term loadings, Mirafi® BXG geogrids offer high strength at low strain and are designed for maximum bearing capacity and shear resistance.
- **True biaxial strengths.** Mirafi® BXG geogrids are biaxial grids that exhibit high tensile strength in both longitudinal and transverse directions, making them suitable for base course reinforcement and soil stabilization applications.
- **Durability.** Superior damage resistance from moderate to severe stress installations.
- **Soil Interaction.** Superior soil confinement resulting in greater load distribution. A

combination of grid structure and polymers create optimum soil-grid interaction.

- **Roll Sizes.** Available in multiple roll sizes to fit the project requirements.
- **Seams.** Panels can be sewn together in the factory or field, providing cross-roll direction strength to facilitate installation.

APPLICATIONS

Mirafi® BXG geogrids deliver strength, long-term performance, reliability and quick installation for base reinforcement for paved roads, construction haul roads, foundation reinforcement, working platforms on weak subgrades, and secondary reinforcement for soil retaining structures.

INSTALLATION GUIDELINES*

Prepare the ground by removing stumps, boulders, etc. and fill in low spots. Unroll the Mirafi® BXG geogrids directly over the ground to be stabilized. If more than one roll width is required, overlap rolls. Place the aggregate onto previously installed geogrid.



Mirafi® BXG Geogrid

Maintain 6in (150mm) to 12in (300mm) cover between truck tires and geosynthetic. Compact the aggregate over the Mirafi® BXG geogrid to the design thickness and fill any ruts with new aggregate as specified in the project guidelines.

* These guidelines serve as a general basis for installation. Detailed instructions are available from your TenCate representative.




Mirafi® BXG Geogrids for Base Course Reinforcement and Soil Stabilization Applications

Mechanical Properties	Test Method	Units	BXG11		BXG12	
			MD	CD	MD	CD
Tensile Strength (at ultimate)	ASTM D6637	lbs/ft (kN/m)	2500 (36.5)	2500 (36.5)	2500 (36.5)	4500 (65.7)
Tensile Strength (at 1% strain)	ASTM D6637	lbs/ft (kN/m)	375 (5.5)	375 (5.5)	375 (5.5)	530 (7.7)
Tensile Strength (at 2% strain)	ASTM D6637	lbs/ft (kN/m)	625 (9.1)	625 (9.1)	625 (9.1)	840 (12.3)
Tensile Strength (at 5% strain)	ASTM D6637	lbs/ft (kN/m)	1000 (14.6)	1000 (14.6)	1000 (14.6)	1350 (19.7)
Tensile Modulus (at 1% strain)	ASTM D6637	lbs/ft (kN/m)	37500 (547)	37500 (547)	37500 (547)	53000 (773)
UV Resistance (at 500 hours)	ASTM D4355	% strength retained	70		70	
Aperture size (normal)		inches (mm)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)	1.0 (25.4)
Physical Properties		Units	BXG11		BXG12	
Roll Width		ft (m)	13.1 (4)		13.1 (4)	
Roll Length		ft (m)	164 (50)		164 (50)	
Est. Gross Weight		lbs (kg)	169 (77)		200 (91)	
Roll Area		yd ² (m ²)	239 (200)		239 (200)	

Mirafi® BXG Geogrids

Typical Base Reinforcement Cross Sections

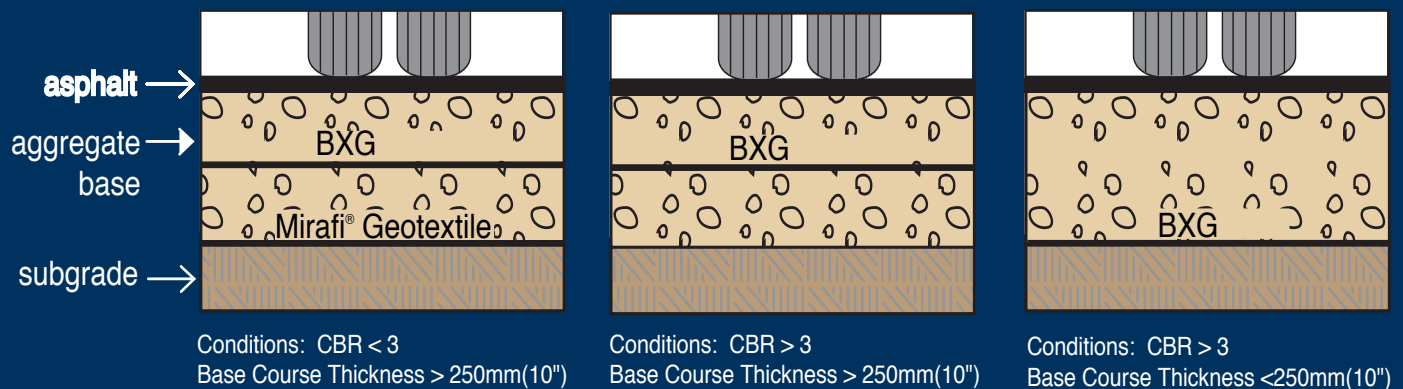

TenCate Geosynthetics Americas assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate Geosynthetics Americas disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation.

© 2015 Nicolon Corporation. All Rights Reserved.

PDS.BXG0915

365 South Holland Drive Tel 800 685 9990 Fax 706 693 4400
 Pendergrass, GA 30567 Tel 706 693 2226 www.mirafi.com

