

Pool Cover Fabrics

Woven Recreational Fabrics

OUR COMPANY

TenCate[®] develops and produces materials to increase performance, reduce costs and deliver measurable results by working with our customers to provide advanced solutions.

TenCate Industrial Fabrics is a leading manufacturer of woven, nonwoven and knitted specialty materials. Utilized throughout the world, our fabrics are used in trampolines, commercial greenhouses, truck covers, tennis windscreens, pool covers and a wide variety of other applications.

OUR PRODUCT


TenCate Industrial Fabrics develops a strong, highly effective fabric for swimming pool covers. Available in widths ranging from 49" to 73", TenCate Nicolon[®] pool cover fabrics provide customers with the ease of fabrication and high shade density to reduce algae growth. The durable, mesh fabric is available in three color combinations: green/black, blue/black, and solid black.

The Difference Nicolon[®] Pool Cover Fabrics Make:

- Lightweight
- Durable
- Mildew & rot resistant
- Non-absorbent
- High tensile strength
- UV resistant
- Chemical resistant


The lightweight, woven fabric is made of polypropylene to provide maximum strength, durability, and dimensional stability. Our unique combination of finishing treatments assures the most consistent and attractive appearance available.

Nicolon[®] pool cover fabrics also function effectively as cattle duster bags, irrigation filters, truck covers and many other applications. We also offer lightweight mesh fabric in blue or black for use in pool skimmers.

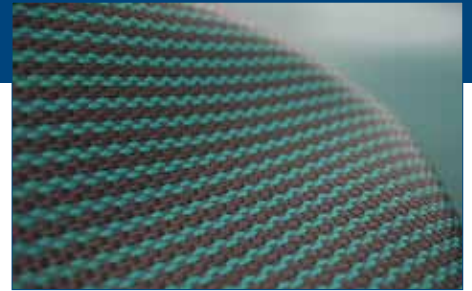

OUR SERVICE

TenCate offers comprehensive service that includes assistance during design and specification. With extensive knowledge and great customer service, TenCate makes the difference.

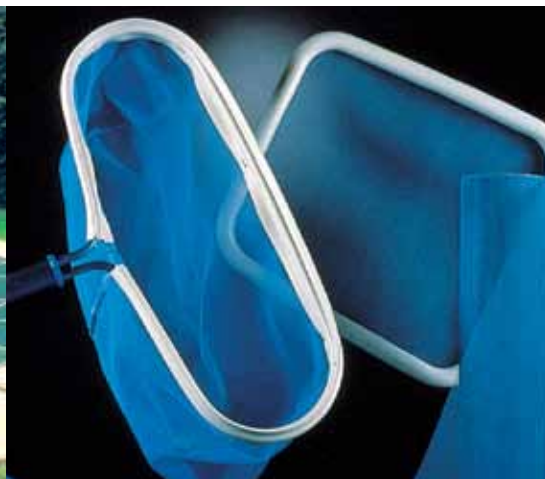

Pool Cover Fabrics

Woven Recreational Fabrics

Specifications	Pool Cover Fabric 26501	Pool Cover Fabric	Pool Skimmer Fabric
Fiber content	100% polypropylene	100% polypropylene	100% polypropylene
Color	Black/Green	Green & black, blue & black	Blue, black
Construction	34 x 11	34 x 20	20 x 20
Finish	Tentered & calendered	Tentered & calendered	Tentered
Weight, ASTM D-5261	7.1 oz/yd ²	4.5 oz/yd ²	2.3 oz/yd ²
Selvage	Woven	Woven	Slit
Grab tensile strength	Warp: 300 lbs	Warp: 265 lbs	Warp: 126 lbs
ASTM D-4632	Fill: 440 lbs	Fill: 160 lbs	Fill: 109 lbs
Water flow	12 gal/ft ² /min	100 gal/ft ² /min	
Width	61" 73"	49" 55" 61" 67" 73"	18" 24" 36" 51" 72"
Length	150 yards	150 yards	334 yards

Properties are average values.

TenCate Geosynthetics Americas does not assume liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate Geosynthetics North America disclaims any and all express, implied, statutory standards, warranties, guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

© 2013 TenCate Geosynthetics Americas

PDS.POOL0513

365 South Holland Drive Tel 800 685 9990 Fax 706 693 4400
 Pendergrass, GA 30567 Tel 706 693 2226 www.tencate.com



 **TENCATE**[™]
 materials that make a difference