

## Mirafi® RSi - Series Woven Geosynthetics for Soil Stabilization and Base Course Reinforcement Applications

TenCate develops and produces materials that deliver increased performance, reduce costs and measurable results to provide advanced solutions utilizing patent pending Mirafi® RSi geosynthetics that make a difference.

The Difference Mirafi® RSi-Series Woven Integrated\* Geosynthetics Make:

- Modulus. Separation. Confinement. Water flow. Product identification. **Superior integration\***.
- Reinforcement Strength. Higher tensile modulus properties than the leading stabilization products.
- Separation and Filtration. Unique double layer construction provides a wide range of pore sizes for an excellent separation factor, superior filtration and flow characteristics of a fine to coarse sand layer.
- Soil and Base Course Interaction. Excellent soil and base course confinement resulting in greater load distribution.
- Durability. Robust damage resistance for moderate to severe stress installations.
- Roll Sizes. Mirafi® RSi-Series geosynthetics come in several roll sizes to fit project requirements.

- Seams. Panels can be seamed in the factory or field, providing cross-roll direction strength to facilitate efficient installation.

### APPLICATIONS

When superior performance, flexibility and versatility are necessary, Mirafi® RSi-Series geosynthetics make the difference for varying application needs including: base course reinforcement and subgrade stabilization for road, runway and railway construction; embankment stabilization on soft foundations; reinforcement for mechanically stabilized earth (MSE) structures; liner support, voids bridging, reinforcement over soft hazardous pond closures and other environmental market applications.

### INSTALLATION GUIDELINES\*\*

**Geosynthetic Placement**  
Place the geosynthetic directly on prepared surface. It is advisable to leave vegetative cover such as grass and weeds in place to provide a support matting for construction activities. The geosynthetic should be deployed flat and tight with no wrinkles or folds. The rolls should be oriented as shown on plans to ensure the principal strength direction of the material is placed in the correct orientation. Adjacent rolls should be overlapped or seamed as a function of subgrade strength (CBR). Prior to fill placement, Mirafi® RSi-Series geosynthetics should be held in place using suitable means such as pins, soil, staples or sandbags to limit movement during fill placement.



Mirafi® RSi-Series Woven Geosynthetic

### Fill Placement

Fill should be placed directly over Mirafi® RSi geosynthetic in 8in (20cm) to 12in (30cm) loose lifts. For very weak subgrades, 18in (45cm) lifts or thicker lifts may be required to stabilize the subgrade, as directed by the engineer. Most rubber-tired vehicles can be driven at slow speeds, less than 10mph (16km/h) and in straight paths over the exposed geosynthetic without causing damage. Sudden braking and sharp turning should be avoided. Tracked construction equipment should not be operated directly upon the geosynthetic. A minimum fill soil thickness of 6in (15cm) is required prior to operation of tracked vehicles over the geosynthetic. Turning of tracked vehicles should be kept to a minimum to prevent tracks from displacing the fill and damaging the geotextile.

\*\* These guidelines serve as a general basis for installation. Detailed instructions are available from your TenCate representative.

Visit [www.mirafi.com](http://www.mirafi.com) for a demonstration video

Breakthrough Research: TenCate Mirafi® Geosynthetic Outperforms Others in Independent Full - Scale Study.



Protective & Outdoor Fabrics    **Geosynthetics**  
Aerospace Composites            Industrial Fabrics  
Armour Composites                Synthetic Grass


\*Integration refers to the overall set of described characteristics based on a review of technical specifications for comparable products published by their respective manufacturers. Individual characteristics of these products vary and may meet, exceed, or fall below one or more of the above described individual characteristics.

## Mirafi® RSi - Series Woven Geosynthetics


### for Soil Stabilization and Base Course Reinforcement Applications

Mechanical Properties	Test Method	Unit	RS280i	RS380i	RS580i
<b>STRENGTH</b>			(Patent Pending)	(Patent #8,333,220 and 8,598,054)	
Tensile Modulus @ 2% strain (CD)	ASTM D4595	lbs/ft (kN/m)	30,000 (438)	51,000 (744)	90,000 (1313)
Tensile Modulus @ 5% strain (CD)	ASTM D4595	lbs/ft (kN/m)	32,400 (472)	45,120 (658)	87,600 (1279)
<b>HYDRAULIC</b>					
Flow Rate <sup>1</sup>	ASTM D4491	gal/min/ft <sup>2</sup> (l/min/m <sup>2</sup> )	70 (2852)	75 (3056)	75 (3056)
Permittivity <sup>1</sup>	ASTM D4491	sec <sup>-1</sup>	0.9	0.9	1.0
<b>SOIL RETENTION</b>					
Apparent Opening Size (AOS) <sup>2</sup>	ASTM D4751	U.S. Sieve (mm)	40 (0.425)	40 (0.425)	40 (0.425)
Pore Size O <sub>50</sub>	ASTM D6767	microns	196 <sup>4</sup>	185 <sup>4</sup>	185 <sup>4</sup>
Pore Size O <sub>85</sub>	ASTM D6767	microns	345 <sup>4</sup>	365 <sup>4</sup>	350 <sup>4</sup>
<b>SOIL INTERACTION</b>					
Interaction Coefficient <sup>3</sup>	ASTM D6706	---	0.89 <sup>5</sup>	0.89 <sup>5</sup>	0.9 <sup>5</sup>
Factory Seam Strength	ASTM D4884	lbs/ft (kN/m)	2400 (35)	2700 (39.4)	3000 (43.8)
UV Resistance (at 500 hours) <sup>5</sup>	ASTM D4355	% strength retained	90	90	90
<sup>1</sup> Minimum Roll Value <sup>2</sup> ASTM D4751: AOS is Maximum Opening Diameter Value <sup>3</sup> Interaction Coefficient value is for sand or gravel based on testing by SGI Testing Services. <sup>4</sup> Typical Values <sup>5</sup> Minimum Test Value					
<b>Physical Properties</b>		<b>Unit</b>	<b>RS280i</b>	<b>RS380i</b>	<b>RS580i</b>
Roll Width		ft (m)	15 (4.6) 17 (5.2)	15 (4.6) 17 (5.2)	15 (4.6) 17 (5.2)
Roll Length		ft (m)	300 (91)	300 (91)	300 (91)
Roll Area		yd <sup>2</sup> (m <sup>2</sup> )	500 (418) 567 (474)	500 (418) 567 (474)	500 (418) 567 (474)

### Mirafi® RSi-Series Woven Geosynthetics

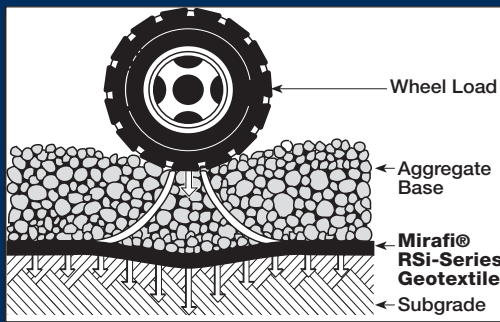

Subgrade Load Distribution

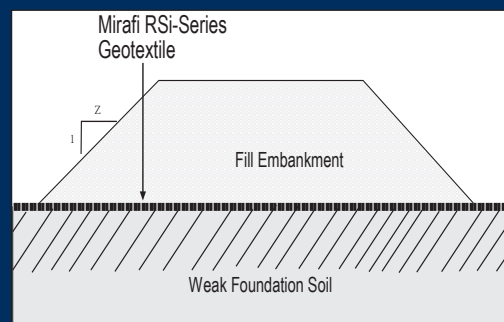

Embankments Over Soft Soils

TenCate Geosynthetics Americas assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate Geosynthetics Americas disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation.

© 2015 Nicolon Corporation. All Rights Reserved.

PDS.RS10615

365 South Holland Drive Tel 800 685 9990 Fax 706 693 4400  
 Pendergrass, GA 30567 Tel 706 693 2226 www.mirafi.com



**TENCATE**  
 materials that make a difference